

product description:

for installing devices (sensors, cameras etc.) in insulated facades from 80 mm insulation layer thickness
suitable for common types of insulation (polystyrene, mineral wool)
installation also in final insulated facades
mounting plate suitable for screws with a diam. of 4 to 5mm
permanent load capacity 15 N
included in the package: screw carrier, mounting plate, mounting instructions, screws

Use the MDFZ 80/VDZ set for the first mounting plate installation, which also includes a manual drilling set. This drilling set is reusable.

material: PP

color: light grey RAL 7035

self-snuffing: yes, within 30 s

temperature resistance: -25 - +60 °C

flaming loop test: 850 °C

fire class of the underlying material: A1-F

weight: 97 g

meets the requirements: ČSN EN 60 670-1
ČSN EN IEC 60670-1 ed.2

storage: ČSN 64 0090

MDFZ 80_KB – mounting plate, packed in cartons

recycling symbols



box



cardboard



screws











WARNING

risks associated with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person
follow the manufacturer's installation instructions according to the installation instructions and videos
damage to the product - if the box is visibly damaged, stop using it
under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers

Assembly instructions:

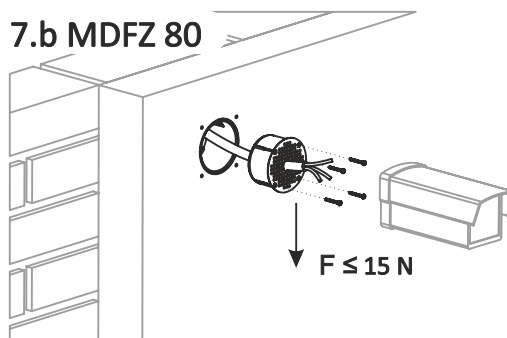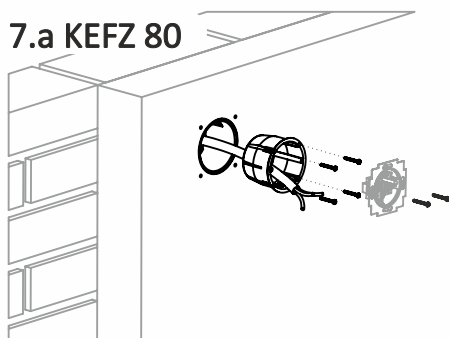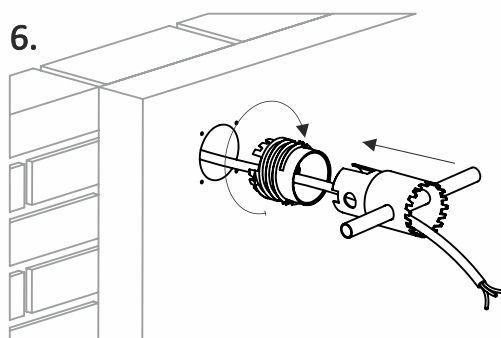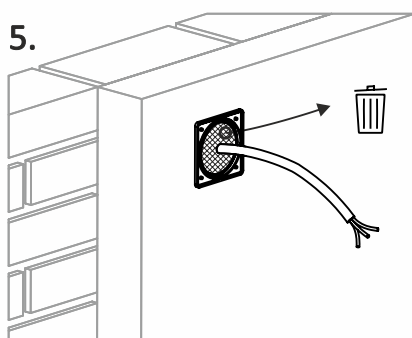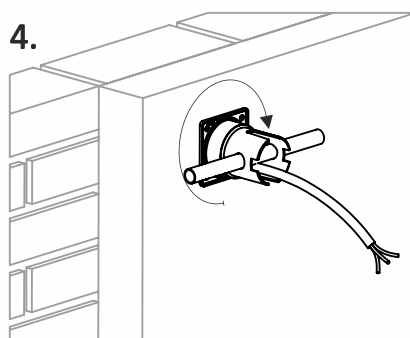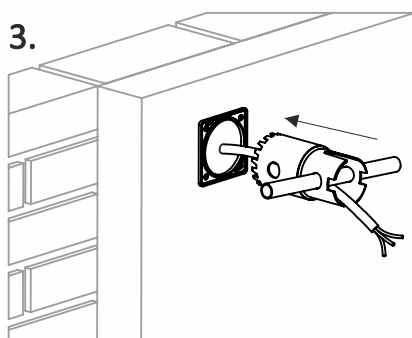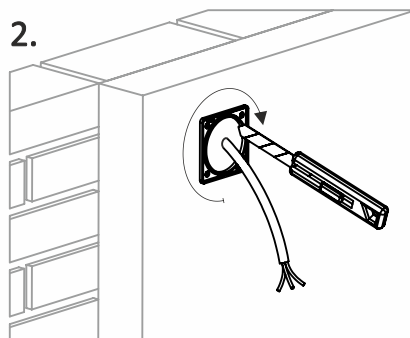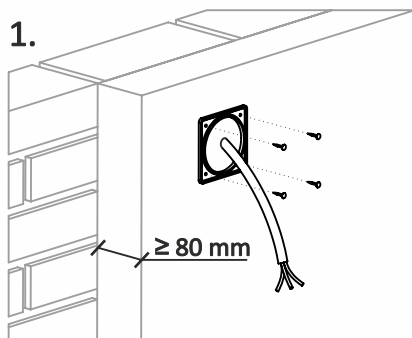

<https://youtu.be/g2pgZ7ttQ3g>