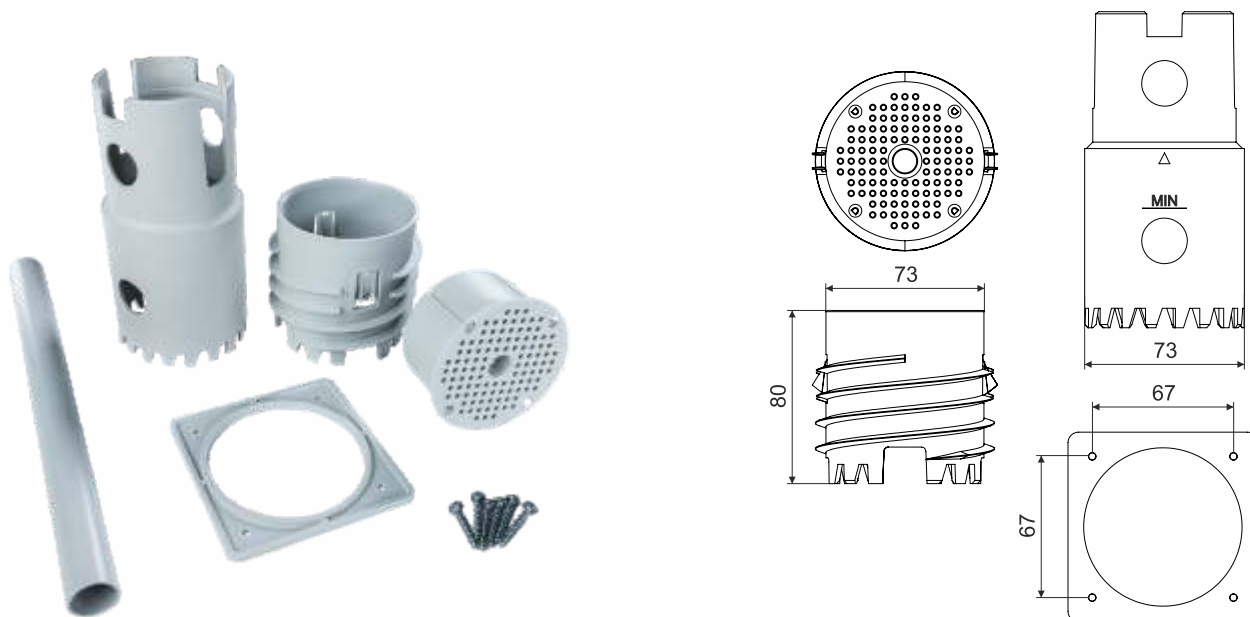




product description:

for installing devices (sensors, cameras etc.) in insulated facades from 80 mm insulation layer thickness
 suitable for common types of insulation (polystyrene, mineral wool)
 installation also in final insulated facades
 mounting plate suitable for screws with a diam. of 4 to 5mm
 permanent load capacity 15 N
 included in the package: screw carrier, mounting plate, hand drilling set, mounting instructions, screws

The mounting plate set MDFZ 80/VDZ includes a reusable manual drill to make a hole for the mounting plate installation.

material: PP; PA (drill)

color: light grey RAL 7035

self-snuffing: yes, within 30 s

temperature resistance: -25 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-F

weight: 220 g

meets the requirements: ČSN EN 60 670-1
 ČSN EN IEC 60670-1 ed.2

storage: ČSN 64 0090

MDFZ 80/VDZ_KB – mounting plate with a drilling set, packed in cartons

recycling symbols



box



drill



cardboard



screws

 WARNING

risks associated with

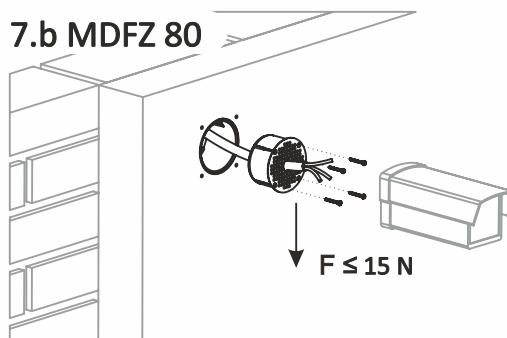
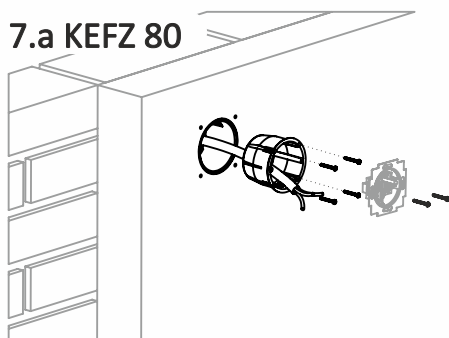
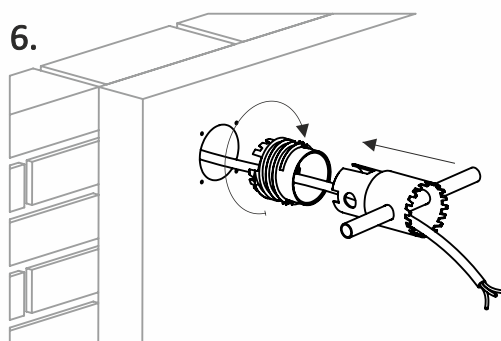
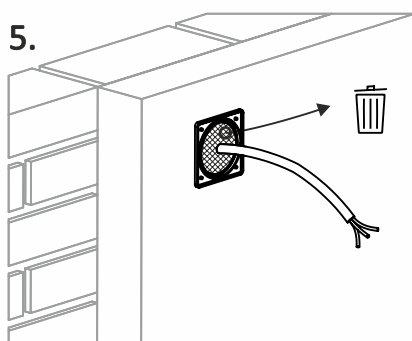
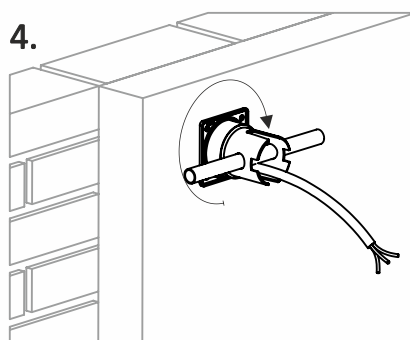
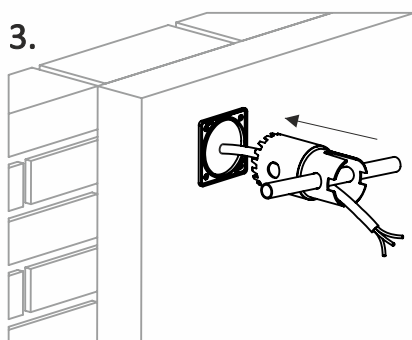
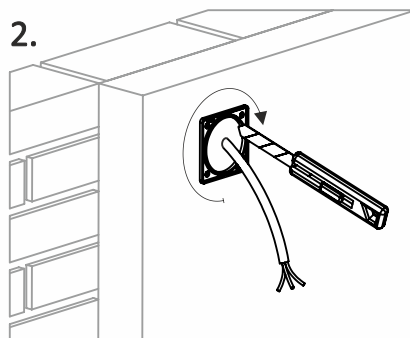
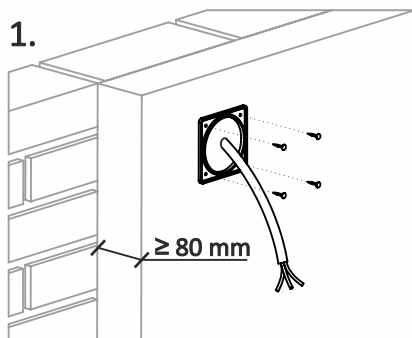
using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person

follow the manufacturer's installation instructions according to the installation instructions and videos

damage to the product - if the box is visibly damaged, stop using it

under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers

Assembly instructions:


<https://youtu.be/g2pgZ7ttQ3g>